







Tel: (07) 3268 5112 or 1300 303 498
 Fax: (07) 3216 4062
 128 Links Avenue South - Eagle Farm QLD 4006
 PO Box 153 Hamilton QLD 4007
 Email: david@absorbedpower.com
 Internet: www.absorbedpower.com



Absorbed Power AGM GT12-35C

The C series range of AGM Batteries are designed specifically to have a large amount of stored current discharge between charging sessions. With a heavy non-porous battery plate, a different active chemical paste material and a stronger electrolyte than normal batteries, the C range of batteries produce superior performance for high power output and excellent deep cycle applications.

Battery Model	GT12-35C			
Designed Cycle Life	> 350 cycles @ -0.5CA to 9.6V			
Capacity (25°C)	20HR (1.75 A, 1.75V)	10HR (3.3A, 1.75V)	5HR (5.95A, 1.75V)	1HR (22.1A, 1.75V)
	35Ah	33Ah	29.8Ah	22.1Ah
Dimensions	Length	Width	Height	Total Height
	195mm (7.68inch)	130mm (5.12inch)	159mm (6.26inch)	180mm(7.09inch)
Approx. Weight	10.5Kg (23.3 lbs)			
Internal Resistance	Full charged at 25°C: 0.01 Ohm			
Self Discharge	3% of capacity declined per month at (25°C)			
Capacity Affected by Temp. (20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage (25°C)	Cycle Use		Float Use	
	14.4-15V(-30mV/°C), max. Current: 8.75A		13.6-13.8(-20mV/ °C)	
CCA	380			
Terminal Type	Standard Terminal			

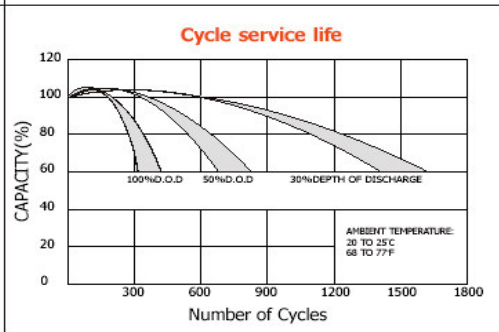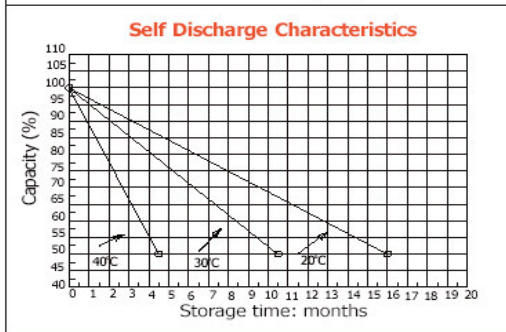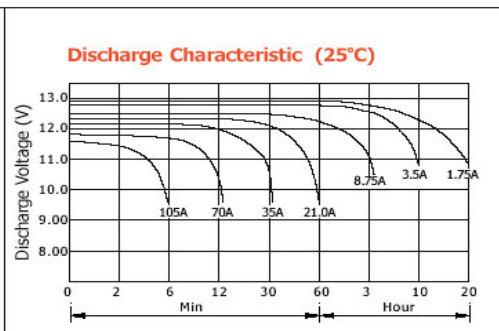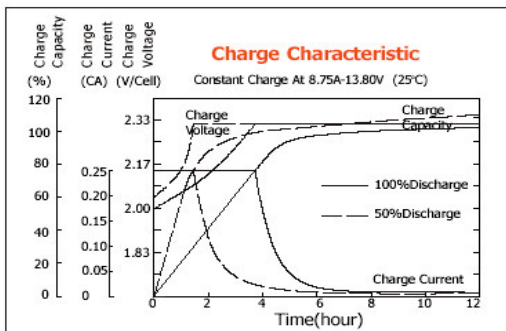

Applications

- General Marine
- Medium Cruiser
- Small Yacht
- Performance Vehicle
- Small / Medium Car
- Speed Boat
- Wheel Chair
- Medical Equipment
- UPS
- Mobility Scooters

24 month warranty
Refer to warranty
policy for terms and
conditions