







Tel: (07) 3268 5112 or 1300 303 498  
 Fax: (07) 3216 4062  
 128 Links Avenue South - Eagle Farm QLD 4006  
 PO Box 153 Hamilton QLD 4007  
 Email: [david@absorbedpower.com](mailto:david@absorbedpower.com)  
 Internet: [www.absorbedpower.com](http://www.absorbedpower.com)



## Absorbed Power AGM GT12-75C

The C series range of AGM Batteries are designed specifically to have a large amount of stored current discharge between charging sessions. With a heavy non-porous battery plate, a different active chemical paste material and a stronger electrolyte than normal batteries, the C range of batteries produce superior performance for high power output and excellent deep cycle applications.

<b>Battery Model</b>	<b>GT12-75C</b>			
<b>Designed Cycle Life</b>	> 350 cycles @ -0.5CA to 9.6V			
<b>Capacity (25 °C)</b>	20HR (3.3 A, 1.75V)	10HR (6.5A, 1.75V)	5HR (11A)	1HR (40A, 1.75V)
	76Ah	75Ah	65Ah	47Ah
<b>Dimensions</b>	Length	Width	Height	Total Height
	258mm (11.7inch)	168mm (6.62inch)	208mm (8.20inch) (h)	226mm(8.90inch)
<b>Approx. Weight</b>	23.0Kg (50.7 lbs)			
<b>Internal Resistance</b>	Full charged at 25°C: 0.0055 Ohm			
<b>Self Discharge</b>	3% of capacity declined per month at (25°C)			
<b>Capacity Affected by Temp. (20HR)</b>	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
<b>Charge Voltage (25 °C)</b>	Cycle Use		Float Use	
	14.4-15V(-30mV/°C), max. Current: 18.7A		13.6-13.8(-20mV/ °C)	
<b>CCA</b>	570			
<b>Terminal Type</b>	M6 Threaded Insert			

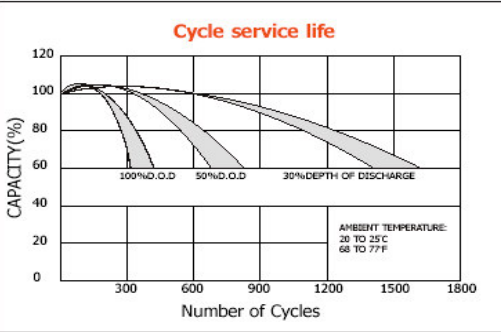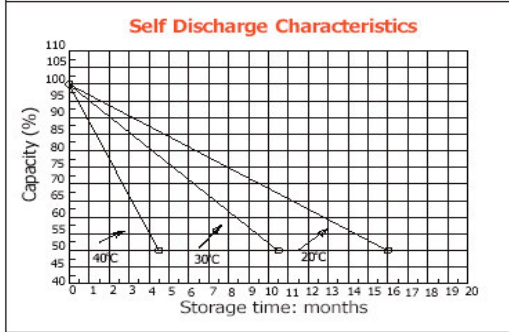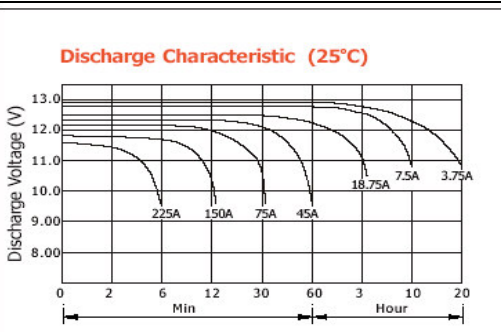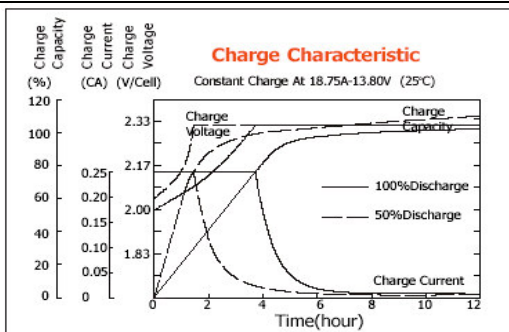

### Applications

- Car Audio
- General Marine
- 4WD
- Medium Cruiser
- Radio / Comms Support
- Speed Boat
- Standby Power
- Wheel Chair
- Caravan
- Performance Vehicle

**24 month warranty**  
 Refer to warranty policy for terms and conditions