







Tel: (07) 3268 5112 or 1300 303 498
 Fax: (07) 3216 4062
 128 Links Avenue South - Eagle Farm QLD 4006
 PO Box 153 Hamilton QLD 4007
 Email: david@absorbedpower.com
 Internet: www.absorbedpower.com



Absorbed Power AGM GT12-7C

The C series range of AGM Batteries are designed specifically to have a large amount of stored current discharge between charging sessions. With a heavy non-porous battery plate, a different active chemical paste material and a stronger electrolyte than normal batteries, the C range of batteries produce superior performance for high power output and excellent deep cycle applications.

Battery Model	GT12-7C			
Designed Cycle Life	> 350 cycles @ -0.5CA to 9.6V			
Capacity (25°C)	20HR (0.4A, 1.75V)	10HR (0.72A, 1.75V)	5HR (1.2A, 1.75V)	1HR (4.6A, 1.75V)
	8Ah	7.2Ah	6Ah	4.6Ah
Dimensions	Length	Width	Height	Total Height
	151mm (5.94inch)	65mm (2.56inch)	95mm (3.74inch)	101mm(3.98inch)
Approx. Weight	2.55Kg (5.63 lbs)			
Internal Resistance	Full charged at 25°C: 0.02 Ohm			
Self Discharge	3% of capacity declined per month at (25°C)			
Capacity Affected by Temp. (20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage (25°)	Cycle Use		Float Use	
	14.4-15V(-30mV/°C), max. Current: 2.1A		13.6-13.8(-20mV/ °C)	
CCA	90			
Terminal Type	Eyelet Spade (pictured) and Heavy Duty Spade			

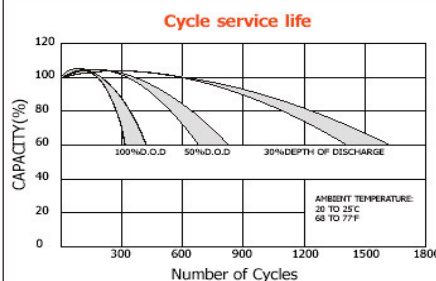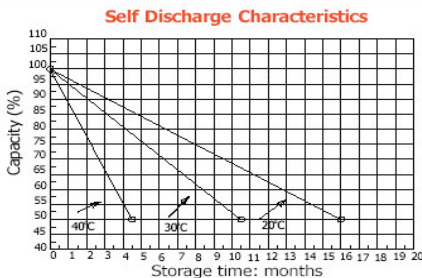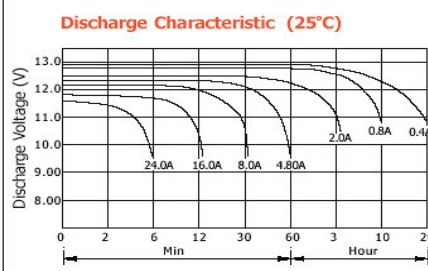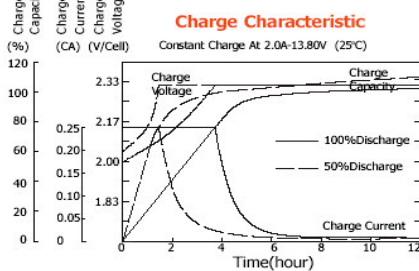

Applications

- Motorbike
- Navigation Lights
- Go Karts
- Power Tools
- Radio / Comms Support
- Control System
- Marine Electrics
- Medical Equipment
- UPS
- Alarm and Fire Panels

24 month warranty
Refer to Warranty
Policy for terms and
conditions