







Tel: +61 (07) 5580 3511  
 Fax: +61 (07) 5580 3522  
 Unit 3, 7 Waterway Drive, Coomera. Qld. 4209  
 Email: info@absorbedpower.com  
 Internet: [www.absorbedpower.com](http://www.absorbedpower.com)



## Absorbed Power AGM GT12-40C

The C series range of AGM Batteries are designed specifically to have a large amount of stored current discharge between charging sessions. With a heavy non-porous battery plate, a different active chemical paste material and a stronger electrolyte than normal batteries, the C range of batteries produce superior performance for high power output and excellent deep cycle applications.

<b>Battery Model</b>	<b>GT12-40C</b>			
<b>Designed Cycle Life</b>	> 350 cycles @ -0.5CA to 9.6V			
<b>Capacity (25°C)</b>	20HR (2.05 A, 1.75V)	10HR (4A, 1.75V)	5HR (6.9A, 1.75V)	1HR (26.8A, 1.75V)
	41Ah	40Ah	34.5Ah	26.8Ah
<b>Dimensions</b>	Length	Width	Height	Total Height
	197mm (7.76inch)	165mm (6.50inch)	170mm (6.69inch)	170mm(6.69inch)
<b>Approx. Weight</b>	13.7Kg (30.2 lbs)			
<b>Internal Resistance</b>	Full charged at 25°C: 0.0095 Ohm			
<b>Self Discharge</b>	3% of capacity declined per month at (25°C)			
<b>Capacity Affected by Temp. (20HR)</b>	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
<b>Charge Voltage (25°C)</b>	Cycle Use		Float Use	
	14.4-15V(-30mV/°C), max. Current: 10A		13.6-13.8(-20mV/°C)	
<b>CCA</b>	400			
<b>Terminal Type</b>	Standard Terminal			

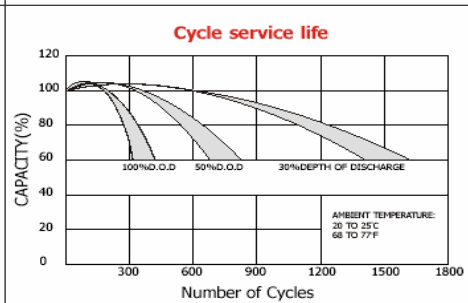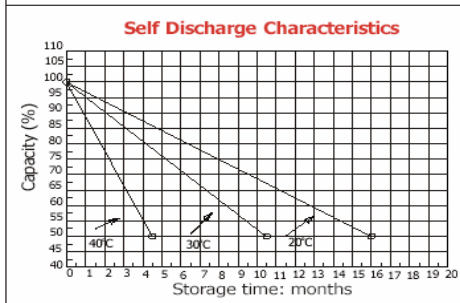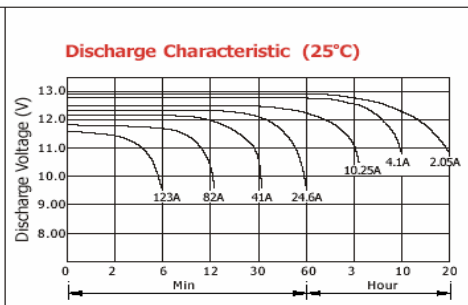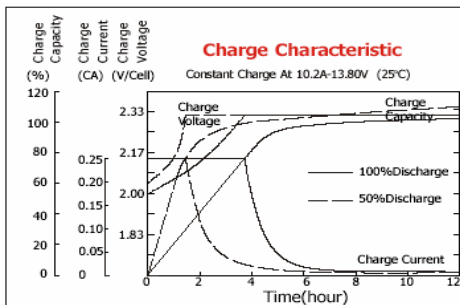

### Applications

- General Marine
- Medium Cruiser
- Performance Vehicle
- Personal Mobility Scooter
- Radio / Comms Support
- Small / Medium Car
- Day Cruiser
- Speed Boat
- Wheel Chair
- Mobility Scooters

**24 month warranty**  
**Refer to warranty**  
**policy for terms and**  
**conditions**